


PITTSBURGH ankle occupational shoes

» Shoes » Occupational shoes » Ankle

Technical sheet

PITTSBURGH ankle occupational shoes

Product code: 4380-02

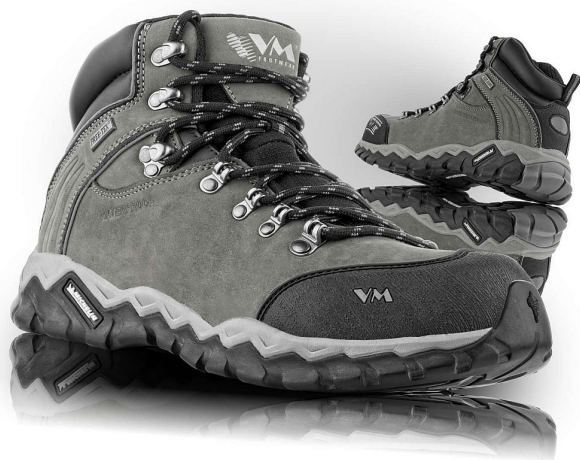

upper	cowhide leather NUBUCK in a thickness of 1,9 - 2,1 mm
lining	breathable thermo-insulation MEMBRANE FREE-TEX®
inner insole	HI-POLY - anatomically shaped lightweight polyurethane foam coated with fabric MESH, antistatic
outsole	MICHELIN EVA/RUBBER - resistant to fuel oils, antistatic, antislip, glued construction
size	38 - 49
standard	EN ISO 20347:2012
version	O2 FO SRA - without steel toe cap, hydrophobic, FREE-TEX®

Properties

PL Midsole penetration protection nonmetallic - PL	No
PS Midsole penetration protection nonmetallic - PS	No
SR Antislip prop. on ceramic with glycerol	No
WPA Water resistant upper	No
HRO Resist. of the outsole against contact heat	No
WR Water resistant	No

PITTSBURGH ankle occupational shoes

» Shoes » Occupational shoes » Ankle

WRU Water resistant upper	Yes
CI Insulation against cold	No
HI Insulation of the outsole against heat	No
FO Resist. of the outsole against fuel oils	Yes
P Midsole penetration protection	No
E Energy absorption in the heel area	Yes
M Instep protection	No
A Antistatic properties	Yes
AN Ankle protection	No
CR Cut resistant upper	No
SRA Antislip prop. on ceramic tile with SLS	Yes
SRB Antislip prop. on smooth steel with glycerol	Yes
SRC Antislip resistance SRA + SRB	Yes
Free-tex Membrane	Yes
Michelin Michelin® sole	Yes
BOA BOA Fit System	No
NON-METALIC Footwear without metal parts	No
ESD antistatic properties ESD	No
Winter Winter footwear	No
ANTICUT Anti-cut boots	No
Standard	20347:2012
Shoe marking	O2

Logistics parameters

Velikost	Net weight	Gross weight	Sales box - widht	Sales box - length	Sales box - height	Group packaging - widht	Group packaging - length	Group packaging - height	Group packaging - weight	Vnitřní délka obuvi
38	1,02 kg	1,33 kg	290 mm	340 mm	120 mm	600 mm	625 mm	365 mm	14,60 kg	0,0 mm
39	1,05 kg	1,35 kg	290 mm	340 mm	120 mm	600 mm	625 mm	365 mm	14,80 kg	0,0 mm
40	1,13 kg	1,46 kg	290 mm	340 mm	120 mm	600 mm	625 mm	365 mm	16,00 kg	0,0 mm
41	1,15 kg	1,48 kg	290 mm	340 mm	120 mm	600 mm	625 mm	365 mm	15,80 kg	0,0 mm
42	1,17 kg	1,51 kg	290 mm	340 mm	120 mm	600 mm	625 mm	365 mm	16,40 kg	0,0 mm
43	1,19 kg	1,61 kg	280 mm	360 mm	135 mm	580 mm	695 mm	390 mm	17,40 kg	0,0 mm
44	1,20 kg	1,61 kg	280 mm	360 mm	135 mm	580 mm	695 mm	390 mm	17,20 kg	0,0 mm
45	1,25 kg	1,62 kg	280 mm	360 mm	135 mm	580 mm	695 mm	390 mm	18,00 kg	0,0 mm
46	1,32 kg	1,68 kg	280 mm	360 mm	135 mm	580 mm	695 mm	390 mm	18,20 kg	0,0 mm
47	1,34 kg	1,69 kg	280 mm	360 mm	135 mm	580 mm	695 mm	390 mm	18,80 kg	0,0 mm

Business parameters

Tarric	64039113
Country	CN
Weight	1,54 kg
Add Unit	NPR
Add Quantity	1