


INDIANA low cut safety shoes

» Shoes » Safety shoes » Low cut

Technical sheet

INDIANA low cut safety shoes

Product code: 8125-S1PLESD

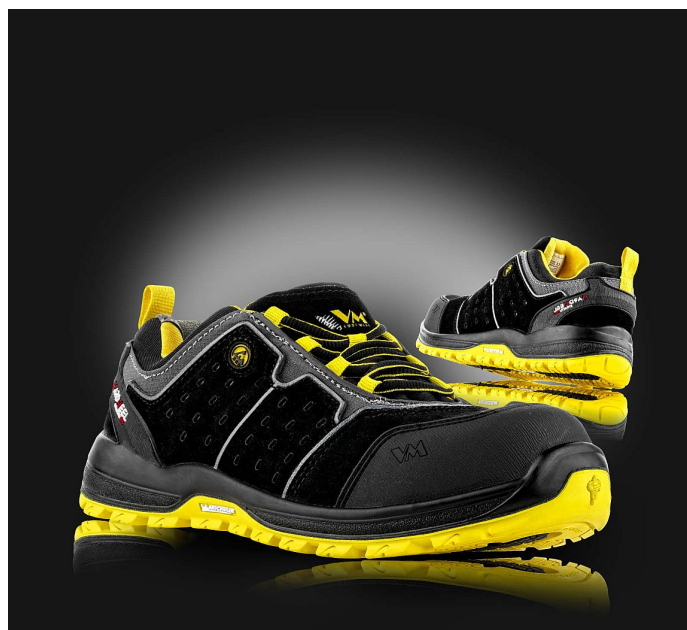

upper	brushed cow suede leather VELOUR in a thickness of 1,7 - 1,9 mm
lining	SOFT-LINNER - stretch, breathable with absorbency
inner insole	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic
outsole	MICHELIN®-PU/RUBBER - resistant to fuel oils, antistatic, antislip
size	36 - 47
standard	EN ISO 20345:2011, EN ISO 61340-5-1:2016
version	S1P ESD SRC - with composite toe cap and kevlar midsole - antistatic properties ESD, NON METALLIC

Properties

PL Midsole penetration protection nonmetallic - PL	No
PS Midsole penetration protection nonmetallic - PS	No
SR Antislip prop. on ceramic with glycerol	No
WPA Water resistant upper	No
HRO Resist. of the outsole against contact heat	No
WR Water resistant	No

INDIANA low cut safety shoes

» Shoes » Safety shoes » Low cut

WRU Water resistant upper	No
CI Insulation against cold	No
HI Insulation of the outsole against heat	No
FO Resist. of the outsole against fuel oils	Yes
P Midsole penetration protection	Yes
E Energy absorption in the heel area	Yes
M Instep protection	No
A Antistatic properties	Yes
AN Ankle protection	No
CR Cut resistant upper	No
SRA Antislip prop. on ceramic tile with SLS	Yes
SRB Antislip prop. on smooth steel with glycerol	Yes
SRC Antislip resistance SRA + SRB	Yes
Free-tex Membrane	No
Michelin Michelin® sole	Yes
BOA BOA Fit System	No
NON-METALIC Footwear without metal parts	No
ESD antistatic properties ESD	Yes
Winter Winter footwear	No
ANTICUT Anti-cut boots	No
Standard	20345:2012
Shoe marking	S1

Logistics parameters

Velikost	Net weight	Gross weight	Sales box - width	Sales box - length	Sales box - height	Group packaging - width	Group packaging - length	Group packaging - height	Group packaging - weight	Vnitřní délka obuvi
36	1,02 kg	1,28 kg	200 mm	315 mm	120 mm	415 mm	615 mm	330 mm	13,80 kg	233,0 mm
37	1,06 kg	1,31 kg	200 mm	315 mm	120 mm	415 mm	615 mm	330 mm	14,00 kg	240,0 mm
38	1,08 kg	1,34 kg	200 mm	315 mm	120 mm	415 mm	615 mm	330 mm	14,30 kg	247,0 mm
39	1,11 kg	1,37 kg	200 mm	315 mm	120 mm	415 mm	615 mm	330 mm	14,40 kg	254,0 mm
40	1,13 kg	1,39 kg	200 mm	315 mm	120 mm	415 mm	615 mm	330 mm	14,60 kg	261,0 mm
41	1,18 kg	1,43 kg	200 mm	315 mm	120 mm	415 mm	615 mm	330 mm	15,20 kg	268,0 mm
42	1,20 kg	1,46 kg	200 mm	315 mm	120 mm	415 mm	615 mm	330 mm	15,40 kg	275,0 mm
43	1,23 kg	1,51 kg	210 mm	345 mm	125 mm	435 mm	640 mm	360 mm	16,00 kg	282,0 mm
44	1,29 kg	1,56 kg	210 mm	345 mm	125 mm	435 mm	640 mm	360 mm	16,40 kg	289,0 mm
45	1,32 kg	1,59 kg	210 mm	345 mm	125 mm	435 mm	640 mm	360 mm	16,80 kg	296,0 mm
46	1,39 kg	1,67 kg	210 mm	345 mm	125 mm	435 mm	640 mm	360 mm	17,60 kg	303,0 mm
47	1,42 kg	1,71 kg	210 mm	345 mm	125 mm	435 mm	640 mm	360 mm	17,80 kg	310,0 mm

Business parameters

Tarric	64034000
Country	CN
Weight	1,44 kg
Add Unit	NPR

INDIANA low cut safety shoes

» Shoes » Safety shoes » Low cut

Add Quantity 1